

“COVID-19 RISK” PREVENTION SIGNAGE

Everlux has developed a range of safety signage that will help the maritime community to implement and communicate the protocols established by IMO Circular Letter No. 4204 and the ICS Guidance for Ship Operators for the Protection of the Health of Seafarers in the prevention of COVID-19 risk to crews, passengers, and shore-based personnel.

This signage range will particularly be beneficial to ship owners and operators that are in the process of obtaining the Certification in Infection Prevention (CIP) for their vessels.



➤ **SAFETY & HYGIENE PROCEDURES, RESPIRATORY ETIQUETTE AND PERSONAL PROTECTION**



➤ **HEALTH SCREENING STATION SIGNS**



➤ **SPECIFIC EMERGENCY, WARNING, MANDATORY AND PROHIBITION SIGNS**



➤ **SIGNS FOR FLOOR APPLICATION TO DELIMIT SPACES AND DISTANCES WITHIN WORK ENVIRONMENTS**

Safety Procedures

(mm)
150x200
200x300
300x400




↓
Available materials:
F, Z, V and T.



SC 001




SC 002

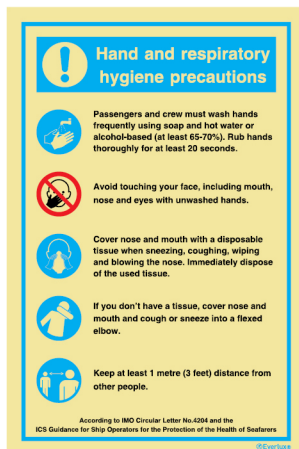

SC 003



SC 004

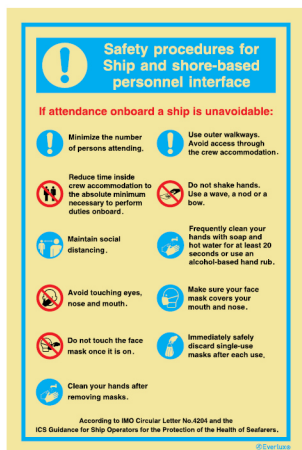

SC 005



SC 006




SC 007



SC 008




SC 009

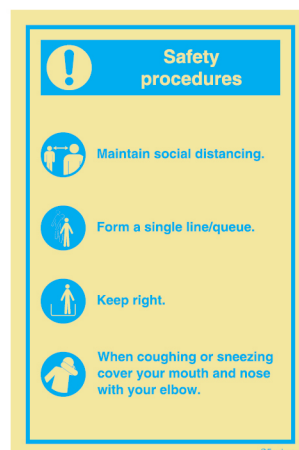


SC 010

Safety Procedures

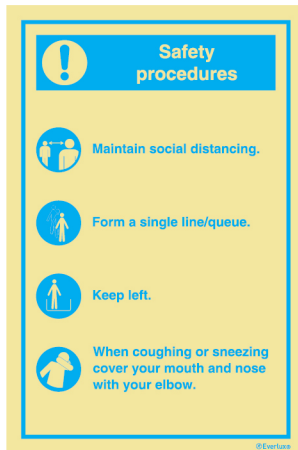

SC 011

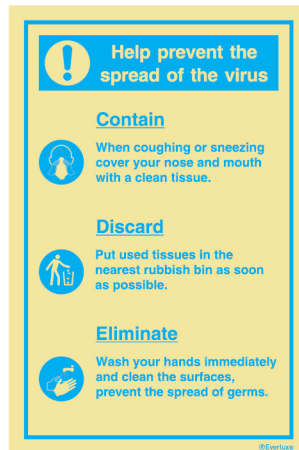


SC 012




SC 013

(mm)
150x200
200x300
300x400


↓
Available materials:
F, Z, V and T.

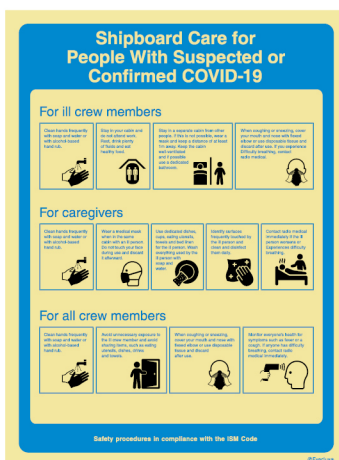

SC 018

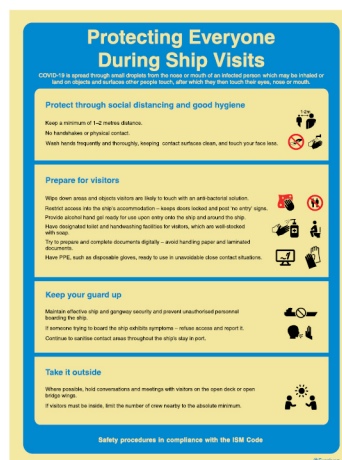

SC 019

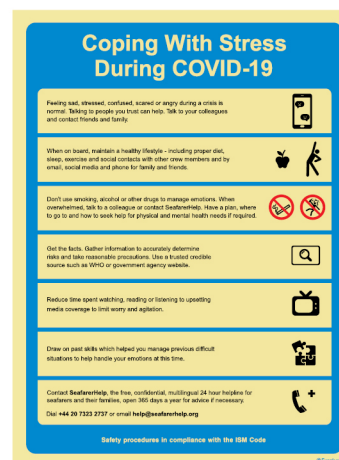

SC 020

(mm)
300x400
400x600

↓
Available materials:
F, Z, O and V.



SC 021



SC 022

Emergency



SC 031



SC 032



SC 041



SC 042

(mm)
150x150
200x200
300x300
(*)150x200
(*)200x300
(*)300x400

↓
Available materials:
F and Z.

Mandatory

(mm)
150x200
200x300
300x400




↓
Available materials:
F, Z, V and T.



Warning



(mm)
150x200
200x300
300x400

↓
Available materials:
F and Z.

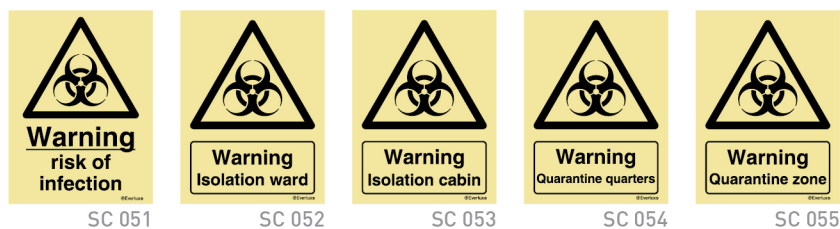

Service

(mm)
300x200
400x300
300x100^(*)
400x150^(*)
600x200^(*)
800x300^(*)

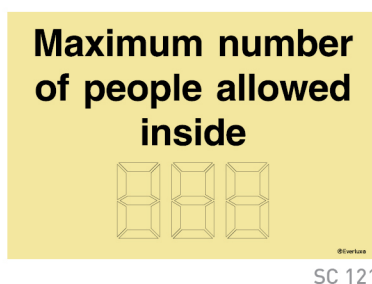
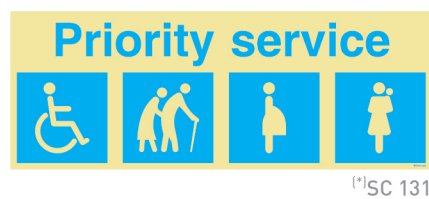


↓
Available materials:
F, Z, V and T.

Prohibition




Composite

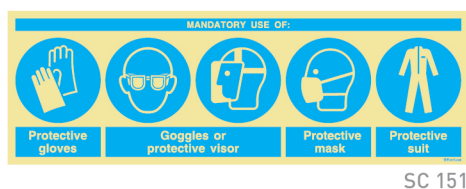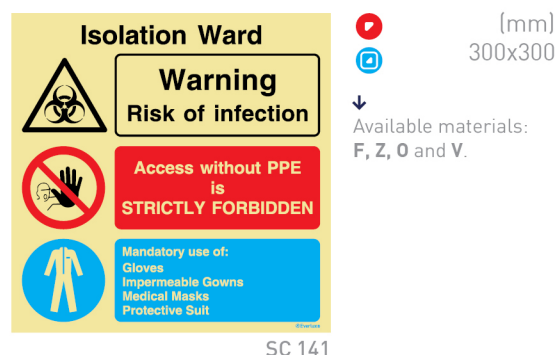

Self-adhesive Photoluminescent Vinyl Discs

Self-adhesive discs supplied in sheet of 6 or 12 units.

Diam. 80mm



Available materials: V e Z.
(1) Supplied by the unit.

Service

(mm)
800x300

↓
Available materials:
VP and VB.



SC 191




SC 192

Safety Distance

(mm)
200x200
400x400
600x600

↓
Available materials:
VP and VB.



SC 201



SC 202



SC 203



SC 204

(mm)
900x200


↓
Available materials:
VP and VB.




SC 211

(mm)
900x150

↓
Available materials:
VP and VB.



SC 221



SC 222



SC 224



SC 223



SC 225

Self-adhesive Discs for Floor Application

(mm)
Diam. 80

↓
Available materials:
VP and VB.




SC 231



SC 232



SC 233





Self-adhesive discs
supplied in sheet of
6 or 12 units.

Diam.80mm


Portable signs



Non-slip Rolls for Floor Application

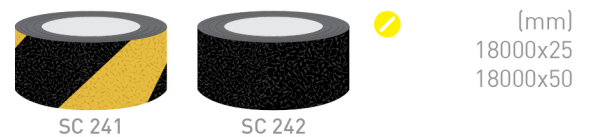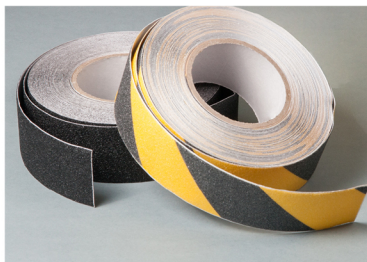

Marking Rolls for Floor Application

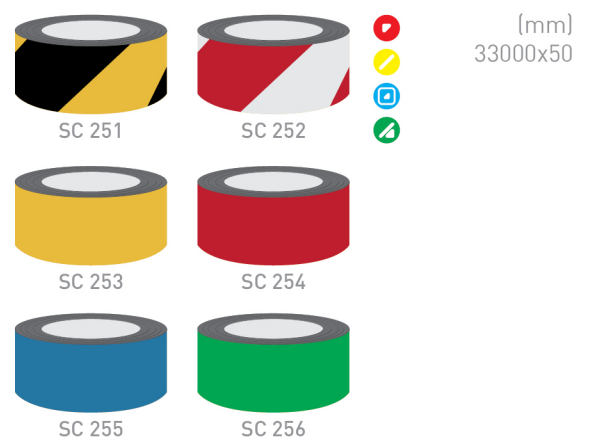

MATERIALS – VERTICAL INSTALLATION SIGNAGE

- **Photoluminescent rigid plastic (F)**
1.2mm thick photoluminescent rigid plastic, antistatic surface and easy to clean.
- **Self-adhesive photoluminescent vinyl (Z)**
0.39mm thick self-adhesive photoluminescent vinyl, antistatic surface and easy to clean.
- **White rigid plastic (O)**
1mm thick white photoluminescent rigid plastic, antistatic surface and easy to clean.
- **White self-adhesive vinyl (V)**
0.061mm thick white self-adhesive vinyl, antistatic surface and easy to clean.
- **2mm thick composite aluminium (T)**
Material composed of two 0.25mm thick aluminium layers and a polyethylene interior. Light, resistant and with anti-static surface.

MATERIALS – HORIZONTAL INSTALLATION SIGNAGE



- **Non-slip vinyl for floor (VP)**
Material composed of a self-adhesive PVC film, 0,08mm thick, coated with a transparent non-slip protection film, in monomeric calandered PVC. The total thickness of the product after application is 0,3mm.

Slip resistance is characterized by the coefficient of static and dynamic friction:

Dynamic friction coefficient (ANSI A 137.1:2012)	
Humid	0,236
Static friction coefficient (ANSI B 101.1:2009)	
Humid	0,452

- **Opaque vinyl for floor (VB)**
Self-adhesive PVC film signage, for temporary use, 0,08mm thick and with anti-static surface.

DIGITAL CATALOGUE

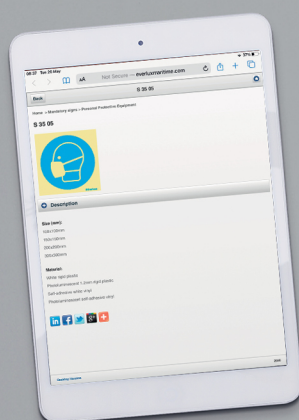

Consult at www.everluxmaritime.com